

a saldare - welding - à souder
para soldar - Schweissausführung

Art. 414



Chiusino Circolare Ø 400 mm apertura ribaltamento e bandiera
Round lid Ø 400 mm reverse and side opening
Trappe circulaire Ø 400 mm ouverture par renversement et laterale
Boca circular Ø 400 mm levantamiento vertical y lateral
Domdeckel Ø 400 mm mit Schwenk-und Seitenöffnung

Ø 400 mm


Pressione massima
Max pressure
Pression maxima
Presión máxima
Max Betriebsdruck

0.2 bar



Coperchio con Accessori
Cover with Accessories
Couvercle avec Accessoires
Tapa con Accesorios
Deckmel mit Zubehör

Art.	AISI	S mm	Peso kg Weight
CA41415A	304	1.5	3,5
CA41415B	316	1.5	3,5

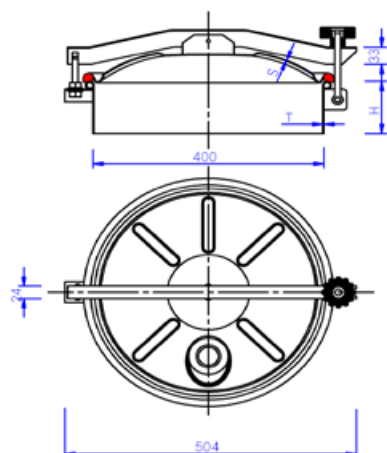

Art.	AISI	H mm	T mm	S mm	P max bar	Peso kg Weight
4140652015A	304	65	2	1.5	0,2	5,4
4141002015A	304	100	2	1.5	0,2	6,1
4141502015A	304	150	2	1.5	0,2	7,1
4142002015A	304	200	2	1.5	0,2	8,1
4144002015A	304	400	2	1.5	0,2	12,1
4144702015A	304	470	2	1.5	0,2	13,5
4140652015B	316	65	2	1.5	0,2	5,4
4141002015B	316	100	2	1.5	0,2	6,1
4141502015B	316	150	2	1.5	0,2	7,1
4142002015B	316	200	2	1.5	0,2	8,1
4144002015B	316	400	2	1.5	0,2	12,1
4144702015B	316	470	2	1.5	0,2	13,5

H = Altezza telaio mm
Frame Heigt mm
Hauteur caadre mm
Altura marco mm
Hohe des Rahmens mm

T = Spessore telaio mm
Frame thickness mm
Epaisseur cadre mm
Espesor marco mm
Starke des Rhamens mm

S = Spessore coperchio mm
Cover thickness mm
Epaisseur portillon mm
Espesor porton mm
Starke des Deckels mm