

a saldare - welding - à souder
para soldar - Schweissausführung

Art. 416



Chiusino circolare ø 600 mm apertura ribaltamento e bandiera
Round lid ø 600 mm riverse and side opening
Trappe circulaire ø 600 mm ouverture par renversement et laterale
Boca circular ø 600 mm levantamiento vertical y lateral
Domdeckel ø 600 mm mit Schwenk-und Seitenöffnung

Ø 600 mm


Pressione massima
Max pressure
Pression maxima
Presión máxima
Max Betriebsdruck

0.1 bar



Coperchio con Accessori
Cover with Accessories
Couvercle avec Accessoires
Tapa con Accesorios
Deckmel mit Zubehör

Art.	AISI	S mm	Peso kg Weight
CA41615A	304	1.5	7
CA41615B	316	1.5	7

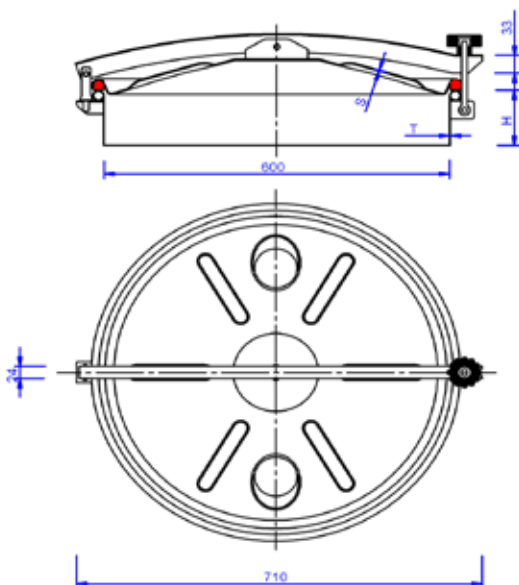

Art.	AISI	H mm	T mm	S mm	P max bar	Peso kg Weight
4160652015A	304	65	2	1.5	0,1	10,3
4161002015A	304	100	2	1.5	0,1	11,4
4161502015A	304	150	2	1.5	0,1	12,9
4162002015A	304	200	2	1.5	0,1	14,5
4164002015A	304	400	2	1.5	0,1	20,6
4164702015A	304	470	2	1.5	0,1	22,7
4160652015B	316	65	2	1.5	0,1	10,3
4161002015B	316	100	2	1.5	0,1	11,4
4161502015B	316	150	2	1.5	0,1	12,9
4162002015B	316	200	2	1.5	0,1	14,5
4164002015B	316	400	2	1.5	0,1	20,6
4164702015B	316	470	2	1.5	0,1	22,7

H = Altezza telaio mm
Frame Heigt mm
Hauteur caadre mm
Altura marco mm
Hohe des Rahmens mm

T = Spessore telaio mm
Frame thickness mm
Epaisseur cadre mm
Espesor marco mm
Starke des Rhamens mm

S = Spessore coperchio mm
Cover thickness mm
Epaisseur portillon mm
Espesor porton mm
Starke des Deckels mm