

a saldare - welding - à souder
para soldar - Schweissausführung

Art. 125

LIDS

marchisia

FM

Portella rettangolare 420 X 318 mm apertura esterna

Rectangular manhole 420 X 318 mm outward opening

Porte rectangulaire 420 X 318 mm ouverture extérieure

Puerta rectangular 420 X 318 mm apertura externa

Rechteckiges Mannloch 420 X 318 mm nach aussen öffnend

420 x 318 mm




Pressione massima
Max pressure
Pression maxima
Presión máxima
Max Betriebsdruck

0.7 bar

Coperchio con Accessori
Cover with Accessories
Couvercle avec Accessoires
Tapa con Accesorios
Deckmel mit Zubehör

Art.	AISI	S mm	Peso kg Weight
CA12520A	304	2,0	7,0
CA12520B	316	2,0	7,0

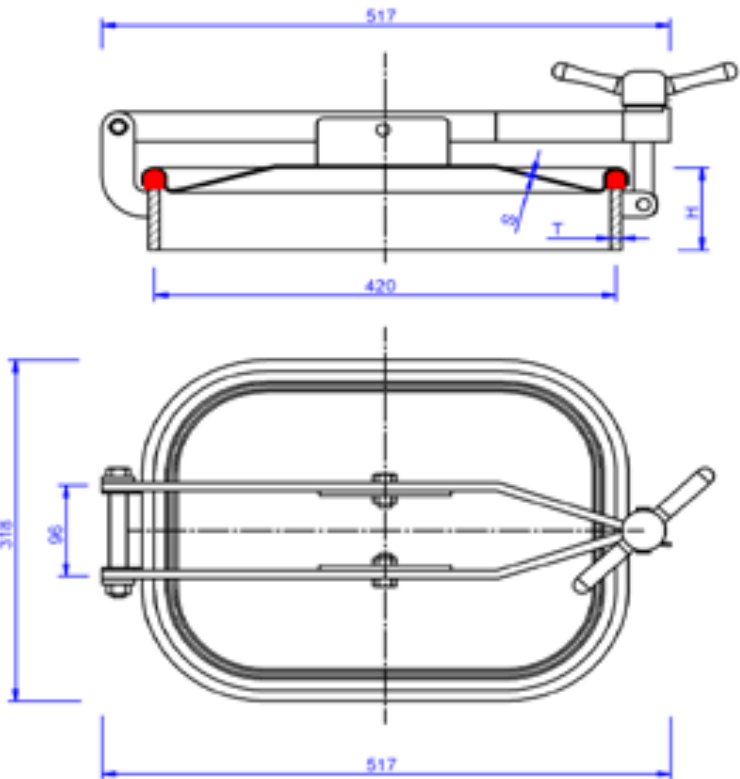

Art.	AISI	H mm	T mm	S mm	P max bar	Peso kg Weight
1250600820A	304	60	8	2,0	0,7	12,5
1251000820A	304	100	8	2,0	0,7	18,0
1250601020A	304	60	10	2,0	0,7	13,8
1251001020A	304	100	10	2,0	0,7	20,1
1250600820B	316	60	8	2,0	0,7	12,5
1251000820B	316	100	8	2,0	0,7	18,0
1250601020B	316	60	10	2,0	0,7	13,8
1251001020B	316	100	10	2,0	0,7	20,1

H = Altezza telaio mm
Frame Heigt mm
Hauteur caadre mm
Altura marco mm
Hohe des Rahmens mm

T = Spessore telaio mm
Frame thickness mm
Epaisseur cadre mm
Espesor marco mm
Starke des Rhamens mm

S = Spessore coperchio mm
Cover thickness mm
Epaisseur portillon mm
Espesor porton mm
Starke des Deckels mm