

a saldare - welding - à souder
para soldar - Schweissausführung

Art. 110

LIDS
marchisia
FM

Portella rettangolare 420 x 530 mm apertura esterna
Rectangular manhole 420 x 530 mm outward opening
Porte rectangulaire 420 x 530 mm ouverture extérieure
Puerta rectangular 420 x 530 mm apertura externa
Rechteckiges Mannloch 420 x 530 mm nach aussen öffnend

420 x 530 mm




Pressione massima
Max pressure
Pression maxima
Presión máxima
Max Betriebsdruck

0.8 bar

Coperchio con Accessori
Cover with Accessories
Couvercle avec Accessoires
Tapa con Accesorios
Deckmel mit Zubehör

Art.	AISI	S mm	Peso Kg Weight
CA11025A	304	2,5	12,2
CA11025B	316	2.5	12,2

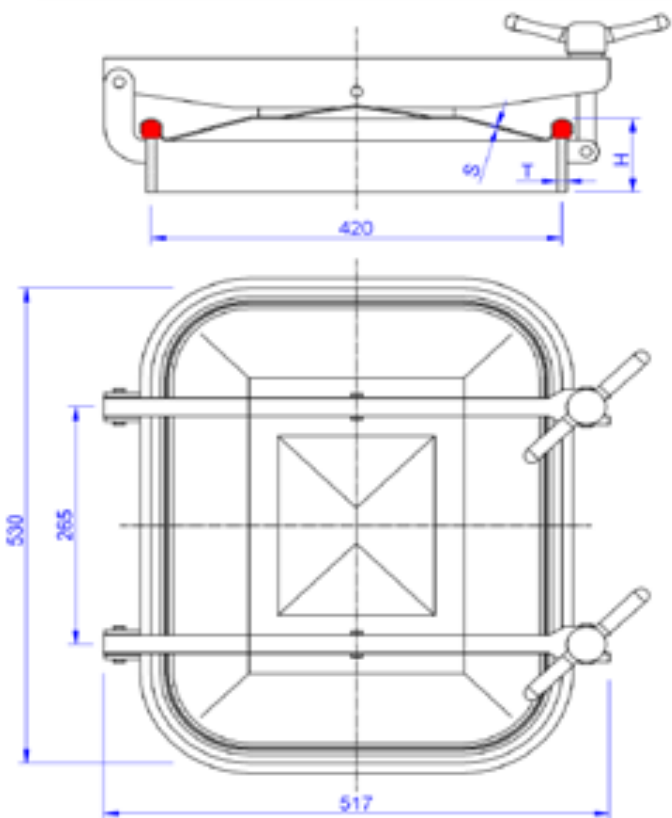

Art.	AISI	H mm	T mm	S mm	P max bar	Peso kg Weight
1100600825A	304	60	8	2.5	0,8	19,0
1101000825A	304	100	8	2.5	0,8	23,4
1100601025A	304	60	10	2.5	0,8	20,7
1101001025A	304	100	10	2.5	0,8	26,2
1100600825B	316	60	8	2.5	0,8	19,0
1101000825B	316	100	8	2.5	0,8	23,4
1100601025B	316	60	10	2.5	0,8	20,7
1101001025B	316	100	10	2.5	0,8	26,2

H = Altezza telaio mm
Frame Heigt mm
Hauteur caadre mm
Altura marco mm
Hohe des Rahmens mm

T = Spessore telaio mm
Frame thickness mm
Epaisseur cadre mm
Espesor marco mm
Starke des Rhamens mm

S = Spessore coperchio mm
Cover thickness mm
Epaisseur portillon mm
Espesor porton mm
Starke des Deckels mm